


Professional stamp

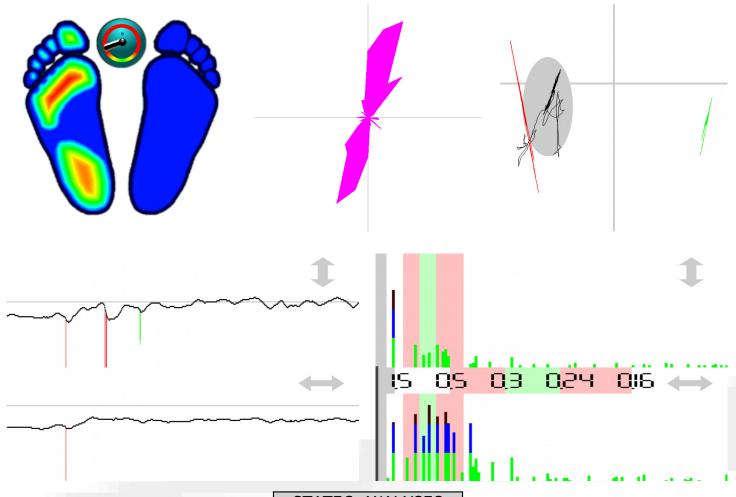

STATIC	ANAI	YSTS
21/11±C	/ \! \/ \L	- · · ·

Forefoot Backfoot Lateral side	Left 33% (22) 38% (28) 71% (50)	Right 10% (22) 20% (28) 29% (50)	
Front side	Front 43% (44)	Back 57% (56)	

DYNAMIC ANALYSIS

Mean COP Standard deviation	Lateral side -11.62 mm 2.2 mm	Front side -4.03 mm 4.34 mm	
Twist	250° (180°)		
Mean speed	0.57 mm/sec		
Area	$32.53 \text{ cm}^2 \text{ (EO} < 210,$	EC<638)	